
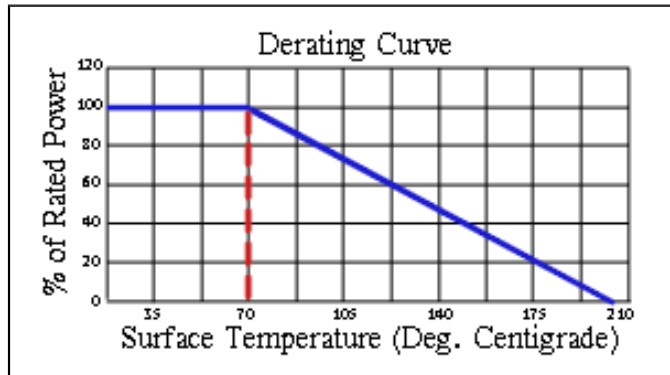


Component General, Inc.

P/N:C135T375P

Microwave T-Pads



Mechanical Specifications

Substrate Material:

Beryllium Oxide Ceramic.

(Note: Letter "P" denotes Beryllium Oxide.)

Terminals:

Rods: Terminal areas are Nickel / Tin plated which reduces oxidation thus providing a more solderable terminal

Discs: Terminal areas are Platinum Silver plated which reduces oxidation thus providing a more solderable terminal.

Temperature Range :

-55°C to + 200°C.

Temperature Coefficient :

Standard Temperature Coefficient is -200 to -300 PPM/°C.

Electrical Specifications

Attenuation Value:

3 - 30 dB

Load Life :


The maximum anticipated change in resistance is 1 % when operated at listed rating for 1,000 hours.

Frequency Range :

D.C. to 18 GHz dependent upon how the resistors are mounted and the mounting Hardware's configuration.

Nominal Power:

20 W.



Part Dimensions

